

# CV-W121/M1001

21.5" TFT Full HD 16:9 Touch Monitor with 1x USB, 1x COM, 1x VGA, 1x DVI-D and 1x DisplayPort, 9V~48V



- 21.5" TFT Full-HD 16:9 LCD with Resistive 5-wire Touch, Projected Capacitive Touch, or Glass Only
- Designed with Aluminum Die-Casting Front Frame
- 1x USB, 1x COM, 1x VGA, 1x DVI-D, 1x DisplayPort, 1x Audio
- IP 65 Compliant Front Panel
- Supports Panel / VESA / Rack Mounting
- Convertible Display System (CDS) Supported
- Built-in Two 5W Internal Speakers

## Overview

The 21.5" (16:9) touch monitor with resistive 5-wire touch screen, projected capacitive touch screen, or glass screen offers resolution up to 1920 x 1080 (Full HD) and 300 nits brightness. CV-W121/M1001 features flat surface and IP65 dust/waterproof front panel. In addition, designed with aluminum die-cast front frame, it is rugged and reliable for industrial environment. CV-W121/M1001 supports Convertible Display System (CDS) which allows to configure, upgrade and maintain your touch monitor easily.

CV-W121/M1001 supports both digital and analog signal input via three types of display interface: VGA, DVI-D and DisplayPort. Touch screen can be connected with USB or COM port. It has OSD function for adjusting the viewing options of display. With support to wide range power input from 9~48VDC, CV-W121/M1001 is designed as an ideal solution for industrial application.

## Specifications

### Display

- LCD Size: 21.5" (16:9)
- Max. Resolution: 1920 x 1080
- Brightness (cd/m<sup>2</sup>): 300
- Contrast Ratio: 5000 : 1
- LCD Color: 16.7M
- Pixel Pitch (mm): 0.24825 (H) x 0.24825 (V)
- Viewing Angle (H-V): 178 / 178
- Backlight MTBF: 50,000 hrs (LED Backlight)

### Touch

- Resistive 5-wire Touch for CV-W121R/M1001 Only)
- Projected Capacitive Touch for CV-W121C/M1001 Only)

### I/O Ports

- 1x VGA
  - 1x DVI-D
  - 1x DisplayPort
  - 1x Audio Input
  - 1x USB 2.0
  - 1x COM Port (Resistive Touch Only)
- (USB & COM Port are reserved for the connection to enable touch usage only)

### Other Features

- Audio: AMP 5W + 5W (Internal Speaker)
- OSD Function: LCD On/Off, Auto, Menu, Up and Down
- Multi-language OSD Function

**Power**

- 1x 3-pin Terminal Block Connector with Power Input 9~48VDC
- 1x Optional AC/DC 12V/5A, 60W Power Adapter

**Environment**

- Operating Temperature: Ambient with air flow: 0°C to 60°C  
(With extended temperature peripherals; Ambient with air flow According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage Temperature: -20°C to 60°C
- Relative humidity:  
CV-W121R/M1001 & CV-W121R/M1001 : 80% RH @ 40°C (non-condensing)  
CV-W121G/M1001 : 90% RH @ 40°C (non-condensing)
- IP Level: IP 65 Compliant Front Panel


**Physical**

- Dimension (WxDxH, mm): 550 X 330.5 X 73 mm
- Weight: 6.68 kg
- Construction Front Panel: Die-Casting Flat Surface
- Mounting: Panel / VESA / \*Rack Mounting (\*with optional mounting kit)


**Certification**

- CE
- FCC Class A

**External Layout**

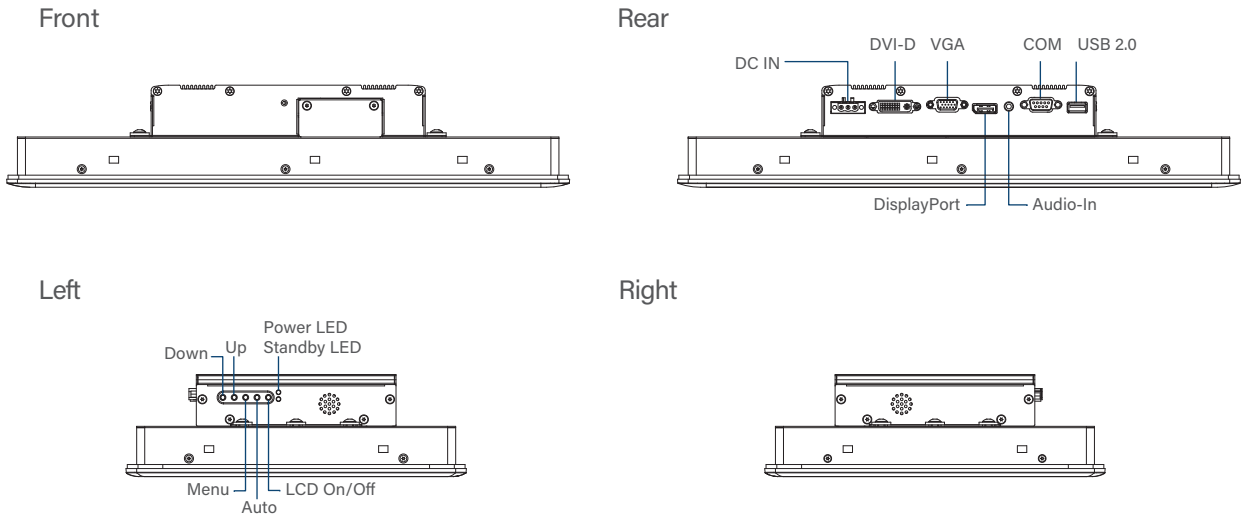

**Dimensions**

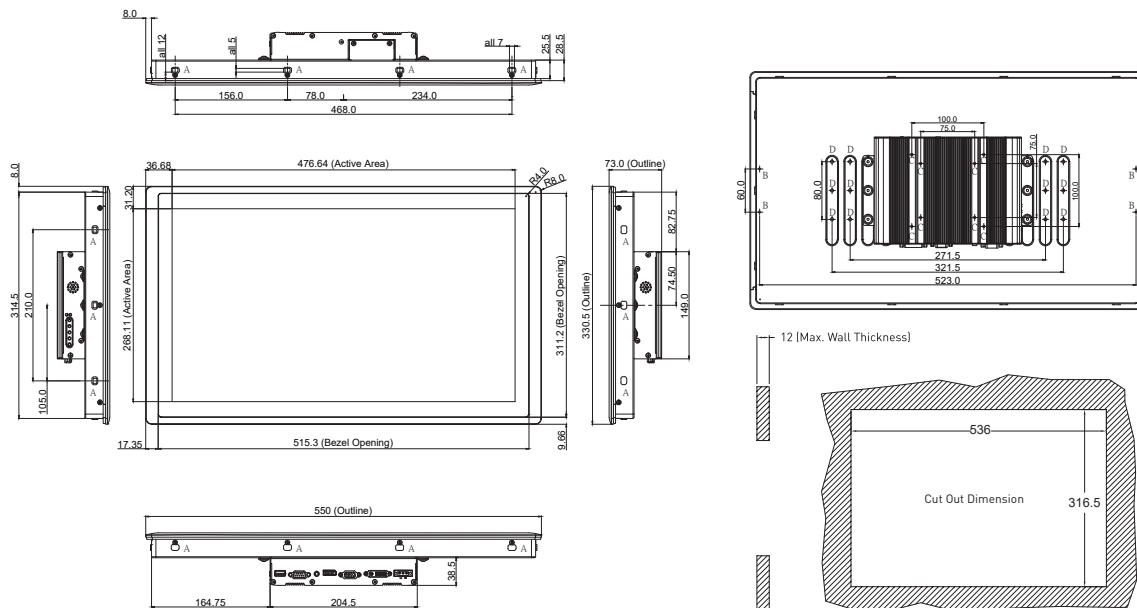

Unit: mm

## Ordering Information

### Available Models

| Model No.      | Product Description  |
|----------------|--|
| CV-W121R/M1001 | 21.5" TFT Full HD 16:9 Display Module with <b>Resistive 5-wire Touch</b> , 1x USB, 1x COM, 1x VGA, 1x DVI-D and 1x DisplayPort, 9V~48V     |
| CV-W121C/M1001 | 21.5" TFT Full HD 16:9 Display Module with <b>Projected Capacitive Touch</b> , 1x USB, 1x COM, 1x VGA, 1x DVI-D and 1x DisplayPort, 9V~48V |
| CV-W121G/M1001 | 21.5" TFT Full HD 16:9 Display Module <b>without Touch</b> , 1x USB, 1x COM, 1x VGA, 1x DVI-D and 1x DisplayPort, 9V~48V                   |

### Package Checklist

- Touch Monitor x 1
- Panel Mounting Kit x 1
- Utility DVD Driver x 1
- Power Terminal Block Connector x 1
- USB Cable x 1
- VGA Cable x 1
- Screw Pack x 1

### Optional Accessories

| Model No.     | Description   |
|---------------|---|
| GST60A12-CIN1 | Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)                     |
| DVI-D Cable   | DVI-D male to DVI-D male Cable 1.8M   |
| SL2-SL3       | US 2 heads power cord, US B type to IEC C13, SVT 18AWG/3C Black 1.8M SL-2+SL-3        |
| SL6-SL3       | EU 2 heads power cord, EU G type to IEC C13, H05VV-F 0.75mm2/3G Black 1.8M SL-6+SL-3  |
| QP026-SL3     | UK 2 heads power cord, UK I type to IEC C13 ,H05VV-F 0.75mm2/3G Black 1.8M QP026+SL-3 |
| URM01         | Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor             |