CO-119C

19" TFT-LCD Open Frame Display Module



ALL-NEW OPEN FRAME DISPLAY MODULE

Overview

Secontact

Cincoze open frame display modules (CO-119C) use our patented CDS (Convertible Display System) technology to connect with a computer module (P2000 or P1000 series) to form an industrial panel PC or connect with a monitor module (M1100 series) to form an industrial touch monitor. Designed for equipment manufacturers, easy installation is the main advantage of the CO-119C. The integrated structure, exclusive adjustable mounting bracket, and support for various mounting methods enable a perfect fit in cabinets of different materials and thicknesses. The robust design also meets the application needs of harsh industrial environments.

Key Features

- 19" TFT-LCD with Projected Capacitive Touch
- Cincoze Patent CDS Technology Support
- Designed with Adjustable Mounting Bracket
- Support Flat / Standard / VESA / Rack Mount
- Front Panel IP65 Compliant
- Wide Operating Temperature

Certifications





Flexible Design and Easy Installation

The CO-100 series includes the exclusive adjustable mounting bracket with thickness adjustment setting, as well as panel and boss type locking. Flat and standard mount options make integration in industrial machinery easy and convenient.

Patent No.: D224544, D224545, I802427

Integrated Structure


The CO-100 series is flexible and reliable. As standard, the open frame display module can be deployed in equipment machines, but remove the mounting bracket and it becomes a standalone display module for use with a VESA mount or in a 19" rack.






Strong, Reliable and Durable

The CO-100 series integrated structure design enables wide temperature support (0–60°C) in addition to front IP65 dustproof and waterproof protection, meeting HMI application requirements.



Highly Adaptable CDS Design

Through the patented CDS technology, the CO-100 can be combined with a computer module to become an industrial panel PC, or with a monitor module to become an industrial touch monitor. Easy maintenance and upgrade flexibility are its main advantages.



Computer Module (P1000 & P2000 Series) or Monitor Module (M1100 Series)

Display Module (CO Series)


Patent No. M482908

Specifications

Model Name	CO-119C	
Display		
LCD Size	• 19" (5:4)	
Resolution	• 1280 x 1024	
Brightness	• 350 cd/m2	
Contract Ratio	• 1000 : 1	
LCD Color	• 16.7M	
Pixel Pitch	• 0.294 (H) x 0.294 (V)	
Viewing Angle	• 170 (H) / 160 (V)	
Backlight MTBF	• 50,000 hrs (LED Backlight)	
Touch Screen		
Touchscreen Type	Projected Capacitive Touch	
Physical		
Dimension (W x D x H)	• 472.8 x 397.5 x 63mm	
Weight	• 6.91kg	
Construction	One-piece and Slim Bezel Design	
Mounting Type	Flat / Standard / VESA / Rack Mount	
Mounting Bracket	Pre-installed Mounting Bracket with Adjustable Design (Support 11 different stages of adjustment)	
Protection		
Ingress Protection	Front Panel IP65 Compliant * According to IEC60529	
Environment		
Operating Temperature	• 0°C - 50°C (with Industrial Grade peripherals; Ambient with air flow)	
Storage Temperature	• -20°C to 60°C	
Humidity	• 80% RH @ 50°C (Non-condensing)	
EMC	CE, UKCA, FCC, ICES-003 Class A	
EMI	 CISPR 32 Conducted & Radiated: Class A EN/BS EN 55032 Conducted & Radiated: Class A EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A EN/BS EN61000-3-3 Voltage fluctuations & flicker FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A 	
EMS	 EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV EN/IEC 61000-4-6 CS: 3V EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz 	

CO-119C

External Layout

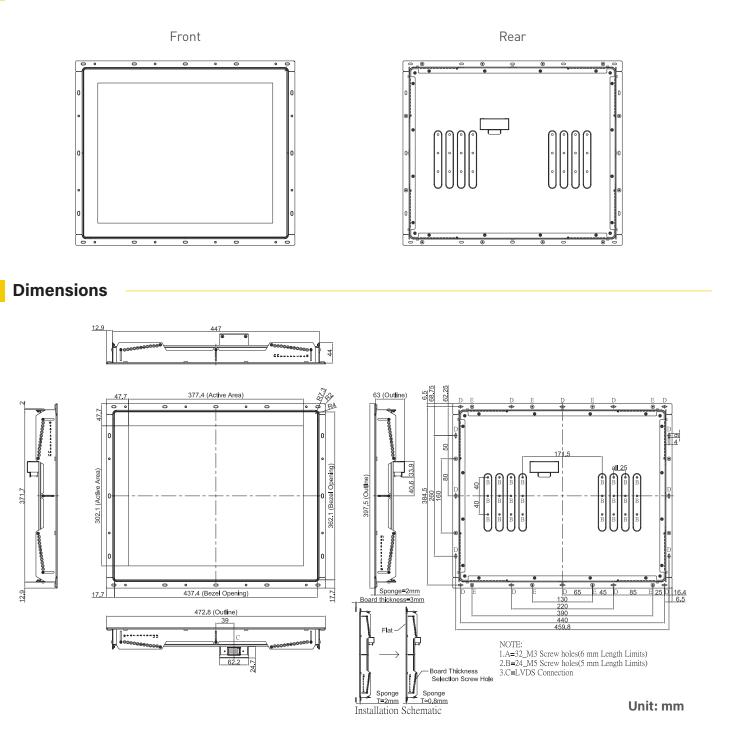

Ordering Information

Available Models

Model No.	Description
CO-119C-R10	19" TFT-LCD SXGA 5:4 Open Frame Display Module with Projected Capacitive Touch

Package Checklist

CO-119C Display Module x1

Updated: Nov. 30, 2023

© Cincoze Co., Ltd. All Rights Reserved. Specifications subject to change without notice. All product names, logos, and brands are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. The use of these names, logos, and brands does not imply endorsement.