

CV-110H

10.4" TFT XGA 4:3 Display Module with Resistive 5-wire / Projected Capacitive Touch



Key Features

- 10.4" XGA TFT 4:3 LCD with Resistive 5-wire / Projected Capacitive Touch
- 50,000 hrs LED Backlight Life
- Resolution up to 1024 x 768 (XGA)
- 400 nits Brightness
- Designed with Aluminum Die-cast Front Frame
- IP 65 Compliant Front Panel
- Convertible Display System (CDS) Supported

»» Overview

CV-110H is a 10.4" LCD display module with resistive 5-wire / projected capacitive touch screen. It offers resolution up to 1024 x 768 (XGA) and 400 nits brightness. CV-110H features flat surface and IP65 dust/waterproof front panel. In addition, designed with aluminum die-cast front frame, it is rugged and reliable for industrial environment. With Convertible Display System (CDS) technology support, CV-110H allows you to configure, upgrade and maintain your Convertible Display System easily.

»» Specifications

Display

- LCD Size: 10.4" (4:3)
- Max. Resolution: 1024x 768
- Brightness (cd/m2): 400
- Contrast Ratio: 1400 : 1
- LCD Color: 16.2M
- Pixel Pitch (mm): 0.2055 (H) x 0.2055 (V)
- Viewing Angle (H-V): 178 / 178
- Backlight MTBF: 50000 hrs (LED Backlight)

Touch

- Resistive 5-wire Touch for CV-110HR-R10 only
- Projected Capacitive Touch for CV-110HC-R10 only

Environment

- Operating Temperature: Ambient with Air Flow: -30°C to 80°C (with Industrial Grade Peripherals)
- Storage Temperature: -30°C to 80°C
- Relative Humidity: 10%~95% (non-condensing)
- IP Level: IP 65 Compliant Front Panel


Physical

- Dimension (WxDxH, mm): 295 x 227.3 x 56.2 mm
- Weight: 2.24 kg
- Construction Front Panel: Die-cast Flat Surface


Certification

- CE
- FCC Class A

»» External Mechanical Layout

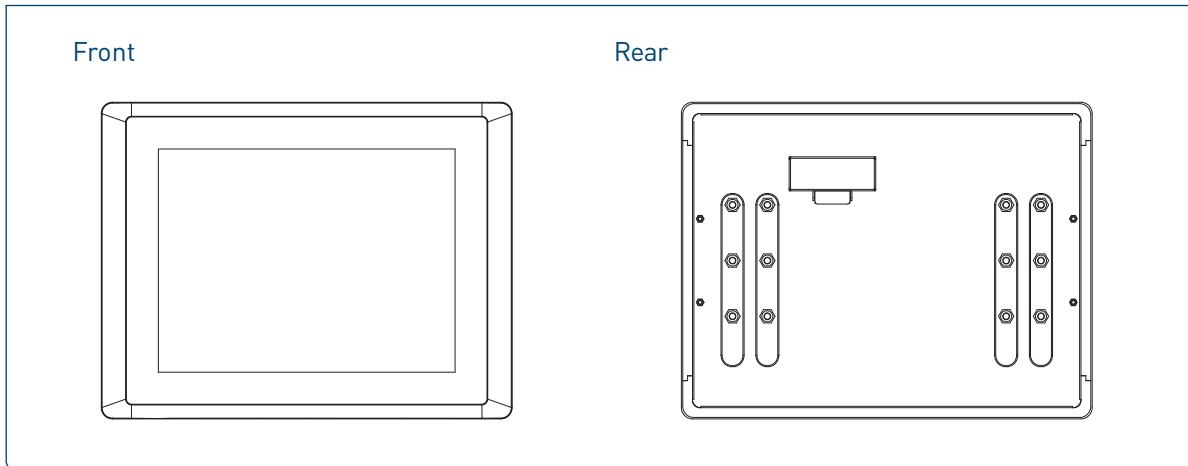

»» Dimensions

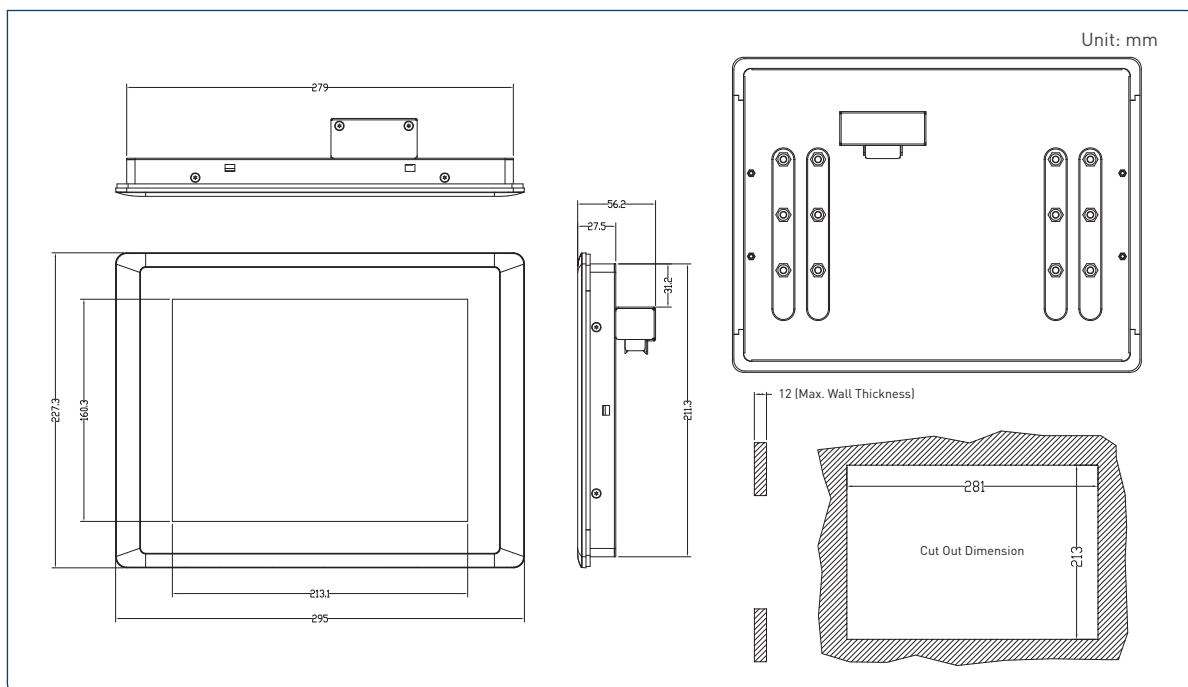

»» Ordering Information

Available Models

Model No.	Product Description
CV-110HR	10.4" TFT XGA 4:3 Display Module with Resistive 5-wire Touch
CV-110HC	10.4" TFT XGA 4:3 Display Module with Projected Capacitive Touch

Package Checklist

- CV-110H Display Module x 1
- Panel Mounting Kit x 6