

# CS-117/P1301 Series

17" TFT-LCD 1500nits Sunlight Readable Touch Panel PC with Intel® Processor N97 / Atom® x7425E Quad Core Slim Embedded Computer & P-Cap. Touch



## POWER EFFICIENT SUNLIGHT READABLE PANEL PC

| CS-100/P1000 Series |

### Overview

 CONTACT

The CS-100/P1301 series is a sunlight-readable panel PC that provides ultra-high brightness of up to 1,800 nits. It is equipped with an Intel® Alder Lake-N processor that provides a complete selection of screen sizes, ratios, and brightnesses. Rich I/O, flexible expansion, rugged, easy on-site maintenance, and other features make the CS-100/P1301 series the best choice for outdoor kiosk or HMI applications.

### Key Features

- 17" TFT-LCD SXGA with Ultra High Brightness up to 1,500 nits
- Onboard Intel® Alder Lake-N Processor N97 and Atom® x7425E Processor
- 1x DDR5 SO-DIMM Socket, Supports up to 4800MHz & 16GB Memory
- 1x M.2 Key E Type 2230 Socket for Wireless/Intel CNVi Module Expansion
- 1x M.2 Key B Type 3042/3052 Socket for 5G/Storage/Add-on Card Expansion
- Front Panel IP65 Compliant
- Designed with Rugged Aluminum Die-casting Front Bezel
- Supports Panel / VESA / Rack Mount
- Supports Cincoze Patent CDS Technology (Patent No. M482908)


### AI & Multitasking Performance

The CS-100/P1301 is equipped with an Intel Alder Lake-N quad-core processor based on the Intel® 7 process. Compared with the previous generation Elkhart Lake platform, the CPU single-thread performance is improved by up to 130%, and the multi-thread performance is improved by 109%. The built-in UHD graphics chip improves AI inference, with 6.85 times the object recognition performance.

#### CPU Single-Thread Performance Up to **1.30X** Improvement



#### CPU Multi-Thread Performance Up to **1.09X** Improvement

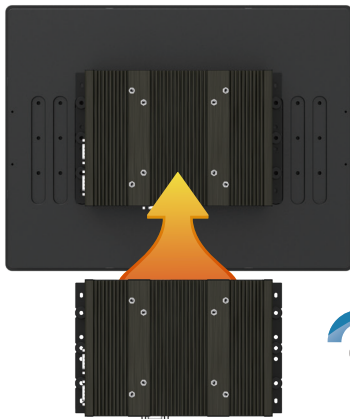

### Convenient Upgrades & Repairs

Cincoze Convertible Display System (CDS) patented technology makes field-side maintenance and future upgrades easier. Replacing a display or improving system performance only requires replacing a single component, which significantly cuts upgrade costs.

Patent No. M482908

### Complete Product Portfolio

The CS-100/P1301 series offers a variety of display options, with screen sizes from 8.4 to 24 inches, support for up to full HD resolution, high brightness up to 1,800 nits, and multi-point P-Cap touchscreen, which can be selected according to application needs.



### Wide Temps, Safe, & Reliable

In order to overcome the harsh outdoor environment and unpredictable climate, the CS-100/P1301 series has a series of industrial-grade protections, including a wide operating temperature range (-20°C to 70°C) that beats the industry standard and an IP65 dustproof/water resistant front panel to ensure a high degree of product safety.

## CS-117 Specifications

| Model Name                      | CS-117  |
|---------------------------------|---|
| <b>Display</b>                  |   |
| LCD Size                        | • 17" (5:4)   |
| Max. Resolution                 | • 1280 x 1024 (SXGA)  |
| Brightness (cd/m <sup>2</sup> ) | • 1500  |
| Contrast Ratio                  | • 800 : 1   |
| LCD Color                       | • 16.7M   |
| Pixel Pitch (mm)                | • 0.264 (H) x 0.264 (V)   |
| Viewing Angle (H-V)             | • 160 / 140   |
| Backlight MTBF                  | • 50,000 hrs (LED Backlight)  |
| <b>Touch Screen</b>             |   |
| Touch Type                      | • Projected Capacitive  |
| <b>Physical</b>                 |   |
| Dimension ( W x D x H )         | • 450 x 350 x 63.2mm  |
| Weight Information              | • 5.64 kg   |
| Mechanical Construction         | • Flat Rugged Aluminum Die-casting Bezel  |
| <b>Environment</b>              |   |
| Front Panel Protection          | • IP 65 Compliant   |
| Operating Temperature           | • -20°C to 80°C (With Industrial Grade Peripherals; Ambient with air flow)  |
| Storage Temperature             | • -30°C to 80°C   |
| Relative Humidity               | • 90% RH @ 40°C (Non-condensing)  |
| EMC                             | • CE, UKCA, FCC, ICES-003 Class A   |
| EMI                             | <ul style="list-style-type: none"> <li>• CISPR 32 Conducted &amp; Radiated: Class A</li> <li>• EN/BS EN 55032 Conducted &amp; Radiated: Class A</li> <li>• EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A</li> <li>• EN/BS EN61000-3-3 Voltage fluctuations &amp; flicker</li> <li>• FCC 47 CFR Part 15B, ICES-003 Conducted &amp; Radiated: Class A</li> </ul>   |
| EMS                             | <ul style="list-style-type: none"> <li>• EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV</li> <li>• EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m</li> <li>• EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV</li> <li>• EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV</li> <li>• EN/IEC 61000-4-6 CS: 3V</li> <li>• EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m</li> <li>• EN/IEC 61000-4-11 Voltage Dips &amp; Voltage Interruptions: 0.5 cycles at 50 Hz</li> </ul> |
| Safety                          | • UL, cUL, CB, IEC, EN 62368-1  |

## P1301 Specifications


| Model Name                              | P1301   |
|---|---|
| <b>System</b>                           |   |
| Processor                               | <ul style="list-style-type: none"> <li>Onboard Intel® Alder Lake-N Series Processor:               <ul style="list-style-type: none"> <li>Intel® Processor N97 4 Cores Up to 3.60 GHz, TDP 12W</li> <li>Intel Atom® x7425E 4 Cores Up to 3.40 GHz, TDP 12W</li> </ul> </li> </ul> |
| Memory                                  | <ul style="list-style-type: none"> <li>1x DDR5 4800MHz SO-DIMM Socket</li> <li>Supports Un-buffered and Non-ECC Type, Up to 16GB</li> </ul>   |
| BIOS                                    | <ul style="list-style-type: none"> <li>AMI BIOS</li> </ul>  |
| <b>Graphics</b>                         |   |
| Graphics Engine                         | <ul style="list-style-type: none"> <li>Integrated Intel® UHD Graphics</li> </ul>  |
| Maximum Display Output                  | <ul style="list-style-type: none"> <li>Supports Triple Independent Display</li> </ul>   |
| CDS                                     | <ul style="list-style-type: none"> <li>1x CDS Connector (1920 x 1080 @60Hz)</li> </ul>  |
| DP                                      | <ul style="list-style-type: none"> <li>1x DisplayPort Connector (4096 x 2304 @60Hz)</li> <li>* Verified maximum resolution: 3840 x 2160 @ 60Hz</li> </ul>   |
| VGA                                     | <ul style="list-style-type: none"> <li>1x VGA Connector (1920 x 1200 @60Hz)</li> </ul>  |
| <b>Audio</b>                            |   |
| Audio Codec                             | Realtek® ALC888, High Definition Audio  |
| Line-out                                | <ul style="list-style-type: none"> <li>1x Line-out, Phone Jack 3.5mm</li> </ul>   |
| Mic-in                                  | <ul style="list-style-type: none"> <li>1x Mic-in, Phone Jack 3.5mm</li> </ul>   |
| <b>I/O</b>                              |   |
| LAN                                     | <ul style="list-style-type: none"> <li>2x 2.5GbE LAN, RJ45</li> <li>- GbE1 / GbE2: Intel® I225</li> </ul>   |
| COM                                     | <ul style="list-style-type: none"> <li>2x RS-232/422/485 with Auto Flow Control Support 5V/12V, DB9</li> </ul>  |
| USB                                     | <ul style="list-style-type: none"> <li>3 x USB 3.2 Gen2x1 (10Gbps), Type A</li> <li>1 x USB 2.0 (480Mbps), Type A</li> </ul>  |
| DIO                                     | <ul style="list-style-type: none"> <li>8x Isolated Digital I/O (4in/4out), 10-Pin Terminal Block</li> </ul>   |
| <b>Storage</b>                          |   |
| SSD/HDD                                 | <ul style="list-style-type: none"> <li>1x 2.5" Front Accessible SATA HDD/SSD Bay</li> </ul>   |
| M.2 SSD                                 | <ul style="list-style-type: none"> <li>1 x M.2 SSD Shared by M.2 Key B Socket</li> </ul>  |
| <b>Expansion</b>                        |   |
| M.2 Key B Socket                        | <ul style="list-style-type: none"> <li>1x M.2 Key B Type 3042/3052 Socket for 5G/Storage/Add-on Card Expansion</li> </ul>   |
| M.2 Key E Socket                        | <ul style="list-style-type: none"> <li>1x M.2 Key E Type 2230 Socket for Wireless/Intel CNVi Module Expansion</li> </ul>  |
| SIM Socket                              | <ul style="list-style-type: none"> <li>1x Front Accessible SIM Socket</li> </ul>  |
| CFM (Control Function Module) Interface | <ul style="list-style-type: none"> <li>1x CFM Interface for optional IGN Module Expansion</li> <li>1x CFM Interface for optional PoE Module Expansion</li> </ul>  |
| <b>Other Function</b>                   |   |
| Clear CMOS Switch                       | <ul style="list-style-type: none"> <li>1x Clear CMOS Switch</li> </ul>  |
| Reset Button                            | <ul style="list-style-type: none"> <li>1x Reset Button</li> </ul>   |
| Instant Reboot                          | <ul style="list-style-type: none"> <li>Support 0.2sec Instant Reboot Technology</li> </ul>  |
| Watchdog Timer                          | <ul style="list-style-type: none"> <li>Software Programmable Supports 256 Levels System Reset</li> </ul>  |

|                                     |   |
|-------------------------------------|---|
| OSD Button                          | <ul style="list-style-type: none"> <li>• LCD On/Off, Brightness Up, Brightness Down</li> </ul>  |
| Internal Speaker                    | <ul style="list-style-type: none"> <li>• AMP 2W + 2W</li> </ul>   |
| Status LED Indicator                | <ul style="list-style-type: none"> <li>• Power LED, HDD LED</li> </ul>  |
| <b>Power</b>                        |   |
| Power Button                        | <ul style="list-style-type: none"> <li>• 1x ATX Power On/Off Button</li> </ul>  |
| Power Mode Switch                   | <ul style="list-style-type: none"> <li>• 1x AT/ATX Mode Switch</li> </ul>   |
| Power Input                         | <ul style="list-style-type: none"> <li>• 9 - 48VDC, 3-pin Terminal Block</li> </ul>   |
| Remote Power On/Off                 | <ul style="list-style-type: none"> <li>• 1x Remote Power On/Off, 2-pin Terminal Block</li> </ul>  |
| Remote Power LED                    | <ul style="list-style-type: none"> <li>• 1x Remote Power LED, 2-pin Terminal Block</li> </ul>   |
| <b>Operating System</b>             |   |
| Microsoft® Windows®                 | <ul style="list-style-type: none"> <li>• Windows®11, Windows®10</li> </ul>  |
| Linux                               | <ul style="list-style-type: none"> <li>• Ubuntu 22.04</li> </ul>  |
| <b>Physical</b>                     |   |
| Dimension ( W x D x H )             | <ul style="list-style-type: none"> <li>• 204.5 x 149 x 46.5mm</li> </ul>  |
| Weight                              | <ul style="list-style-type: none"> <li>• 1.57 kg</li> </ul>   |
| Mechanical Construction             | <ul style="list-style-type: none"> <li>• Extruded Aluminum with Heavy Duty Metal</li> </ul>   |
| Mounting                            | <ul style="list-style-type: none"> <li>• Wall / VESA / CDS / DIN Rail</li> </ul>  |
| Physical Design                     | <ul style="list-style-type: none"> <li>• Fanless Design</li> <li>• Jumper-less Design</li> </ul>  |
| <b>Reliability &amp; Protection</b> |   |
| Reverse Power Input                 | <ul style="list-style-type: none"> <li>• Yes</li> </ul>   |
| Over Voltage Protection             | <ul style="list-style-type: none"> <li>• Protection Range: 51~58V</li> <li>• Protection Type: shut down operating voltage, re-power on at the preset level to recover</li> </ul>  |
| Over Current Protection             | <ul style="list-style-type: none"> <li>• 15A</li> </ul>   |
| CMOS Battery Backup                 | <ul style="list-style-type: none"> <li>• SuperCap Integrated for CMOS Battery Maintenance-free Operation</li> </ul>   |
| MTBF                                | <ul style="list-style-type: none"> <li>• 306,338 Hours - Database: Telcordia SR-332 Issue3, Method 1, Case 3</li> </ul>   |
| <b>Environment</b>                  |   |
| Operating Temperature               | <ul style="list-style-type: none"> <li>• -40°C to 70°C</li> <li>* PassMark Burn-In Test: 100% CPU, 2D/3D Graphics (without thermal throttling)</li> <li>* With extended temperature peripherals; Ambient with air flow</li> <li>* According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14</li> </ul>   |
| Storage Temperature                 | <ul style="list-style-type: none"> <li>• -40°C to 70°C</li> </ul>   |
| Relative Humidity                   | <ul style="list-style-type: none"> <li>• 95%RH @ 70°C (non-Condensing)</li> </ul>   |
| Shock                               | <ul style="list-style-type: none"> <li>• Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)</li> </ul>   |
| Vibration                           | <ul style="list-style-type: none"> <li>• Operating, 1 Grms, 10-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-6)</li> <li>• Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)</li> </ul>  |
| EMC                                 | <ul style="list-style-type: none"> <li>• CE, UKCA, FCC, ICES-003 Class A</li> <li>• EN61000-6-4, EN61000-6-2 @ DC-input 24V</li> </ul>  |
| EMI                                 | <ul style="list-style-type: none"> <li>• CISPR 32 Conducted &amp; Radiated: Class A</li> <li>• EN/BS EN 55032 Conducted &amp; Radiated: Class A</li> <li>• EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A</li> <li>• EN/BS EN61000-3-3 Voltage fluctuations &amp; flicker</li> <li>• FCC 47 CFR Part 15B, ICES-003 Conducted &amp; Radiated: Class A</li> </ul> |


|            |   |
|------------|---|
| <p>EMS</p> | <ul style="list-style-type: none"> <li>• EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV</li> <li>• EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 10 V/m</li> <li>• EN/IEC 61000-4-4 EFT: AC Power: 2 kV; DC Power: 1 kV; Signal: 1 kV</li> <li>• EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV</li> <li>• EN/IEC 61000-4-6 CS: 10V</li> <li>    (**Compliant with the standard when utilizing shielded ethernet cable.)</li> <li>• EN/IEC 61000-4-8 PFMF: 50 Hz, 30A/m</li> <li>• EN/IEC 61000-4-11 Voltage Dips &amp; Voltage Interruptions: 1 cycles at 60 Hz</li> </ul> |
|------------|---|

## CS-117/P1301 External Layout


### Front I/O

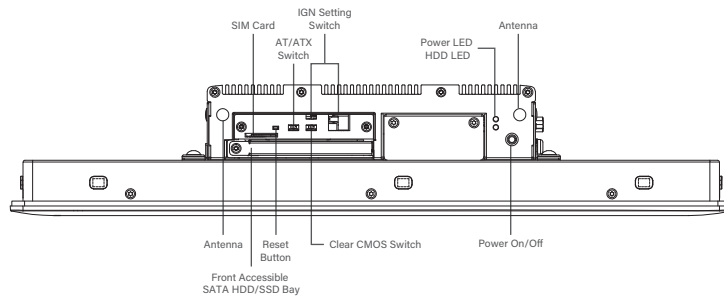


### Rear I/O

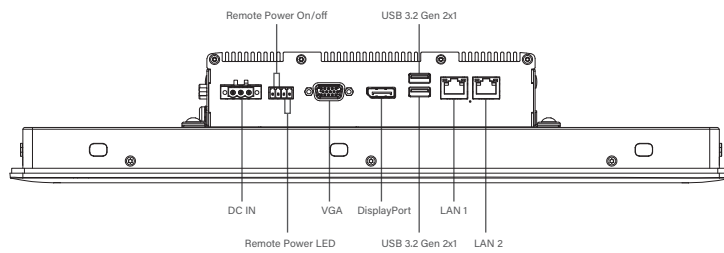


### Left I/O

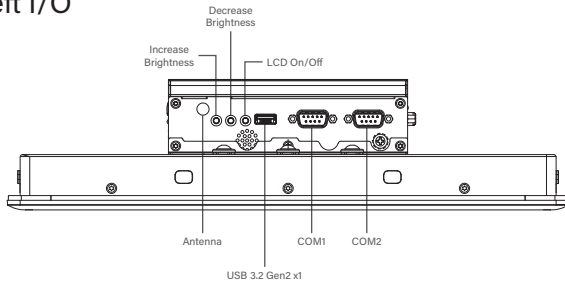

### Right I/O

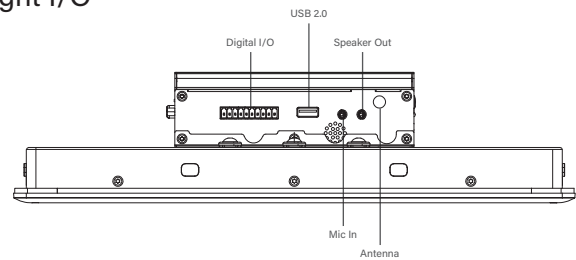

## CS-117/P1301 Dimensions

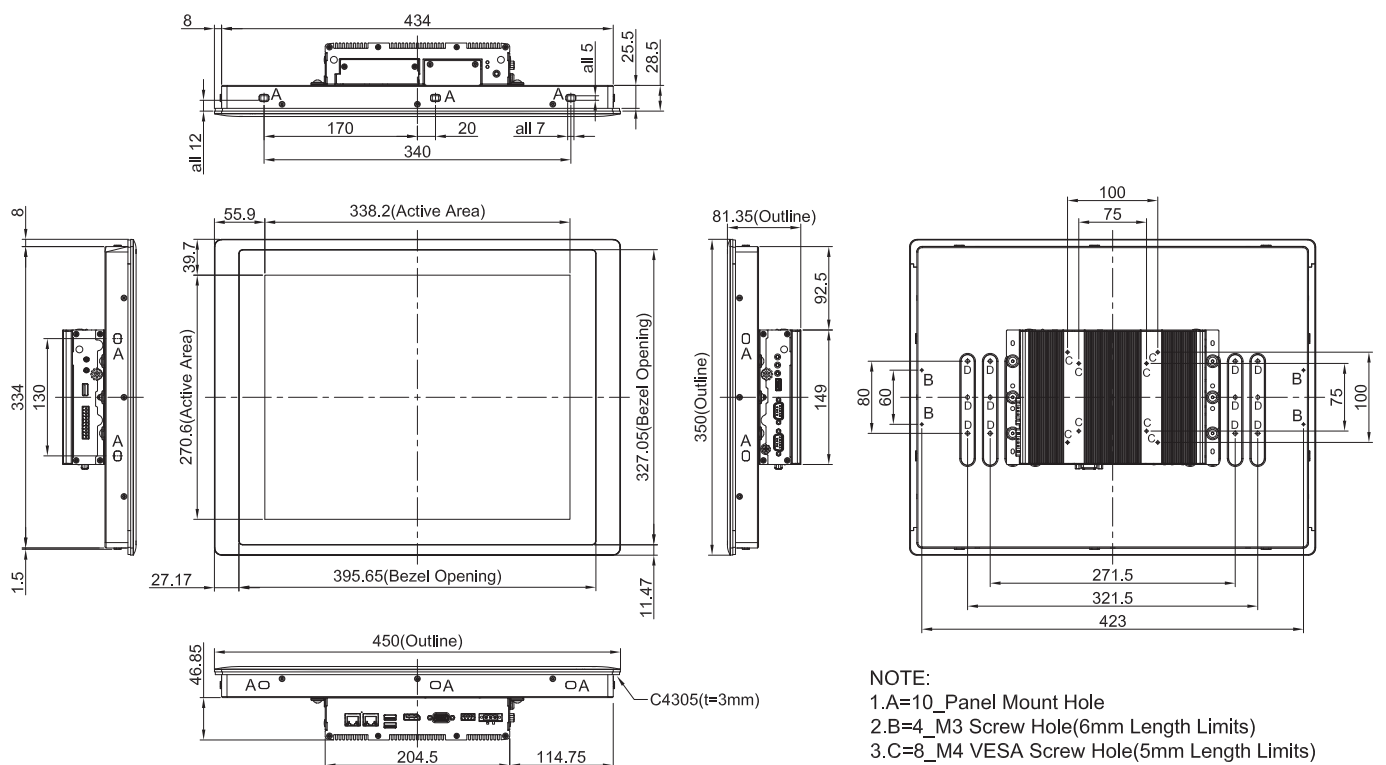

- NOTE:
- 1.A=10\_Panel Mount Hole
  - 2.B=4\_M3 Screw Hole(6mm Length Limits)
  - 3.C=8\_M4 VESA Screw Hole(5mm Length Limits)
  - 4.D=12\_M5 Screw Hole(5mm Length Limits)

Unit: mm

## Ordering Information

### Available Models

| Model No.                    | Description   |
|------------------------------|---|
| CS-117C-R11/P1301-N97-R10    | 17" TFT-LCD 1500nits Sunlight Readable Touch Panel PC with Intel® Processor N97 Quad Core Slim Embedded Computer and P-Cap. Touch |
| CS-117C-R11/P1301-X7425E-R10 | 17" TFT-LCD 1500nits Sunlight Readable Touch Panel PC with Intel® Atom® x7425E Quad Core Slim Embedded Computer and P-Cap. Touch  |

### Model Configuration

|                      | CS-117C | P1301-N97 | P1301-X7425E |
|----------------------|---------|-----------|--------------|
| CS-117C/P1301-N97    | V       | V         | --           |
| CS-117C/P1301-X7425E | V       | --        | V            |

V : Compatible

### Package Checklist

|   |   |
|---|---|
| • CS-117/P1301 Series Panel PC x 1        | • Power Terminal Block Connector x 1              |
| • Thermal Pad (for CPU Thermal Block) x 1 | • Remote Function Terminal Block Connector x 1    |
| • Screw Pack x 2                          | • DIO Terminal Block Connector x 1                |
| • Panel Mounting Kit x 10                 | • M.2 Key B Type 3052 to 3042 Adapter Bracket x 1 |

### Optional Modules and Accessories

| Model No.     | Description  |
|---------------|--|
| CFM-IGN101    | CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable (43 x 36 mm) |
| CFM-PoE02     | CFM Module with PoE Control Function, Individual Port 25.5W                              |
| URM01         | Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor                |
| GST60A12-CIN1 | Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)                        |
| GST120A24-CIN | Adapter AC/DC 24V 5A 120W, GST120A24-CIN, wide temp (-30°C ~ +70°C), level VI            |