

CV-110H Series

10.4" TFT SVGA 4:3 Display Module with Resistive 5-wire /
Projected Capacitive Touch



CONVERTIBLE DISPLAY MODULE

| CV-100 Series |

Overview

[CONTACT](#)

CV-110H Series is a 10.4" LCD display module with resistive 5-wire / projected capacitive touch screen. It offers resolution up to 1024 x 768 (XGA) and 400 nits brightness. CV-110H Series features flat surface and IP65 dust/waterproof front panel. In addition, designed with aluminum die-cast front frame, it is rugged and reliable for industrial environment. With support for Convertible Display System (CDS) technology, CV-110H Series allows you to configure, upgrade and maintain your Convertible Display System easily.

Key Features

- 10.4" XGA TFT 4:3 LCD with Resistive 5-wire / Projected Capacitive Touch
- 70,000 hrs LED Backlight Life
- Resolution up to 1024 x 768 (XGA)
- 470 nits Brightness
- Designed with Aluminum Die-cast Front Frame
- IP 65 Compliant Front Panel
- Convertible Display System (CDS) Supported
- Safety: UL, cUL, CB, IEC, EN 62368-1

Certifications




Specifications


Model Name	CV-110HR		CV-110HC
Display			
LCD Size	▪ 10.4" (4:3)		
Max. Resolution	▪ 1024 x 768		
Brightness (cd/m2)	▪ 470 cd/m ²		
Contrast Ratio	▪ 1000:1		
LCD Color	▪ 16.2M		
Pixel Pitch (mm)	▪ 0.2055 (H) x 0.2055 (V)		
Viewing Angle (H-V)	▪ 178 / 178		
Backlight LED Life Time	▪ 70,000 hours (LED Backlight)		
Touch Screen			
Touch Type	▪ Resistive 5-wire	▪ Projected Capacitive	
Physical			
Dimension (W x D x H)	▪ 295 x 227.3 x 56.2 mm		
Weight Information	▪ 2.24 kg		
Mechanical Construction	▪ Die-Casting Flat Surface		
Power			
Power Consumption	▪ 4.99W (Typ.)	▪ 4.94W (Typ.)	
Environment			
Front Panel Protection	▪ IP 65 Compliant		
Operating Temperature	▪ Ambient with Air flow: -20°C to 75°C (with Industrial Grade Peripherals)	▪ Ambient with Air Flow: -20°C to 80°C (with Industrial Grade peripherals)	
Storage Temperature	▪ -30°C to 80°C		
Relative Humidity	▪ 90% RH @ 40°C (Non-condensing)		
EMC	▪ CE, UKCA, FCC, ICES-003 Class A		
EMI	▪ CISPR 32 Conducted & Radiated: Class A ▪ EN/BS EN 55032 Conducted & Radiated: Class A ▪ EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A ▪ EN/BS EN61000-3-3 Voltage fluctuations & flicker ▪ FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A		
EMS	▪ EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV ▪ EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m ▪ EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV ▪ EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV ▪ EN/IEC 61000-4-6 CS: 3V ▪ EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m ▪ EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz		
Safety	▪ UL, cUL, CB, IEC, EN 62368-1		

External Layout


Front

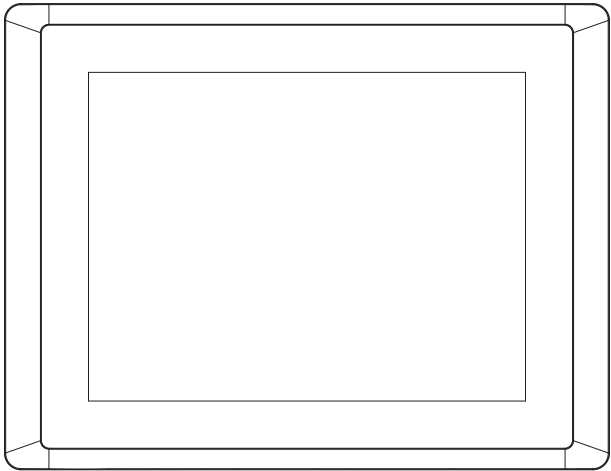

Rear

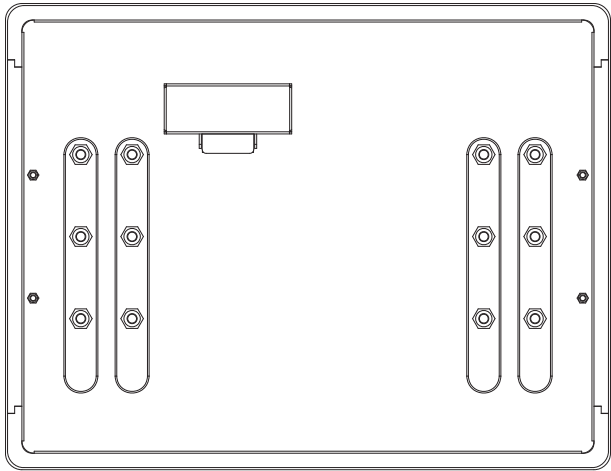

Dimensions

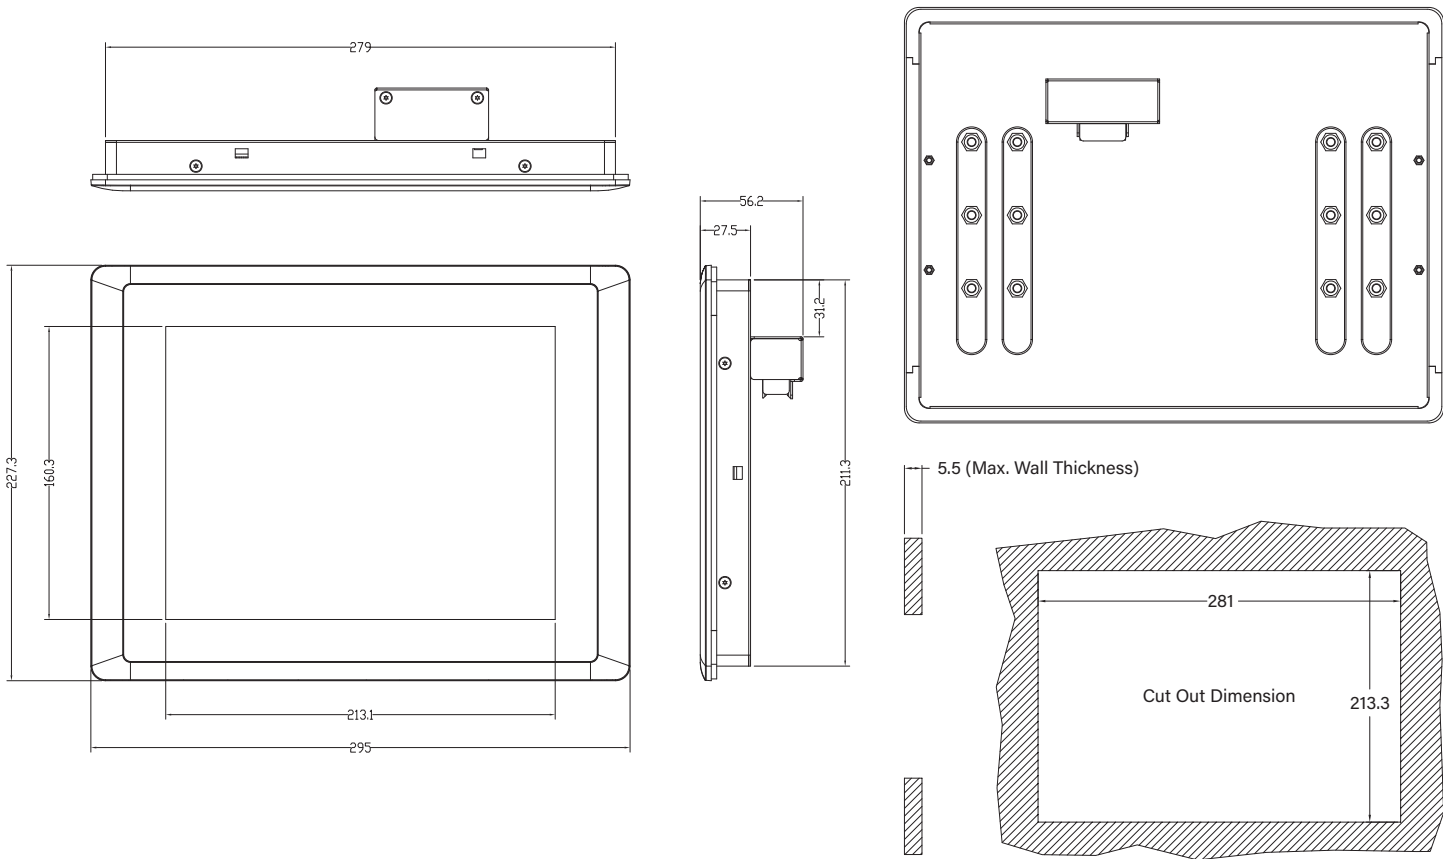

Unit: mm

Ordering Information

Available Models

Model No.	Description
CV-110HR-R11	10.4" TFT XGA 4:3 Display Module with Resistive 5-wire Touch
CV-110HC-R12	10.4" TFT XGA 4:3 Display Module with Projected Capacitive Touch

Package Checklist

• CV-110H Series Display Module x 1	• Panel Mounting Kit x 1
-------------------------------------	--------------------------