

PPM-I360

360W Power Protection Module for Industrial Environments




- Designed to support EN/IEC 61000-4-4 EFT immunity requirements
 - AC Power: 2 kV
 - DC Power: 1 kV
 - Signal Ports: 1 kV

Specifications

Power Input	• 12 – 48VDC, 3-pin Terminal Block
Power Output	• 12 – 48VDC, 3-pin Terminal Block
Inrush Current	• <3.5A @24 VDC
Reverse Power Input Protection	• Yes
Over Voltage Protection	• 51V
Input Over Current Protection	• 15A
Status LED Indicator	• Power Operation LED
Dimension (W x D x H)	• 51 × 162 × 47.5 mm
Weight Information	• 0.44 Kg
Operating Temperature	• -40°C to 60°C (-40°F to 140°F)
Storage Temperature	• -40°C to 85°C (-40°F to 185°F)

Dimensions

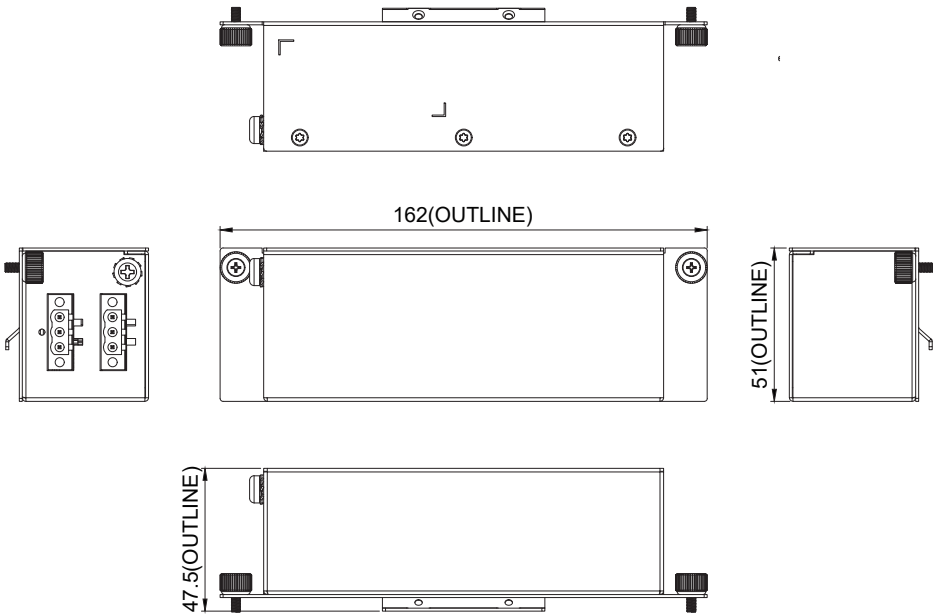

Unit: mm

Ordering Information

Available Models

Model No.	Description
PPM-I360-01-R10	360W Power Protection Module for DV/DX Series
PPM-I360-02-R10	360W Power Protection Module for DS Series
PPM-I360-03-R10	360W Power Protection Module for GM Series

Package Check List

• Power Protection Module x1	• Power Cable x1
------------------------------	------------------

Compatible List

Computer System

PPM Model No.	Compatible System Models
PPM-I360-01-R10	• DX-1300 • DX-1200 • DX-1100 • DV-1000
PPM-I360-02-R10	• DS-1500 Series • DS-1400 Series • DS-1300 Series • DS-1200 Series
PPM-I360-03-R10	• GM-1100 • GM-1000